



SIDE VIEW

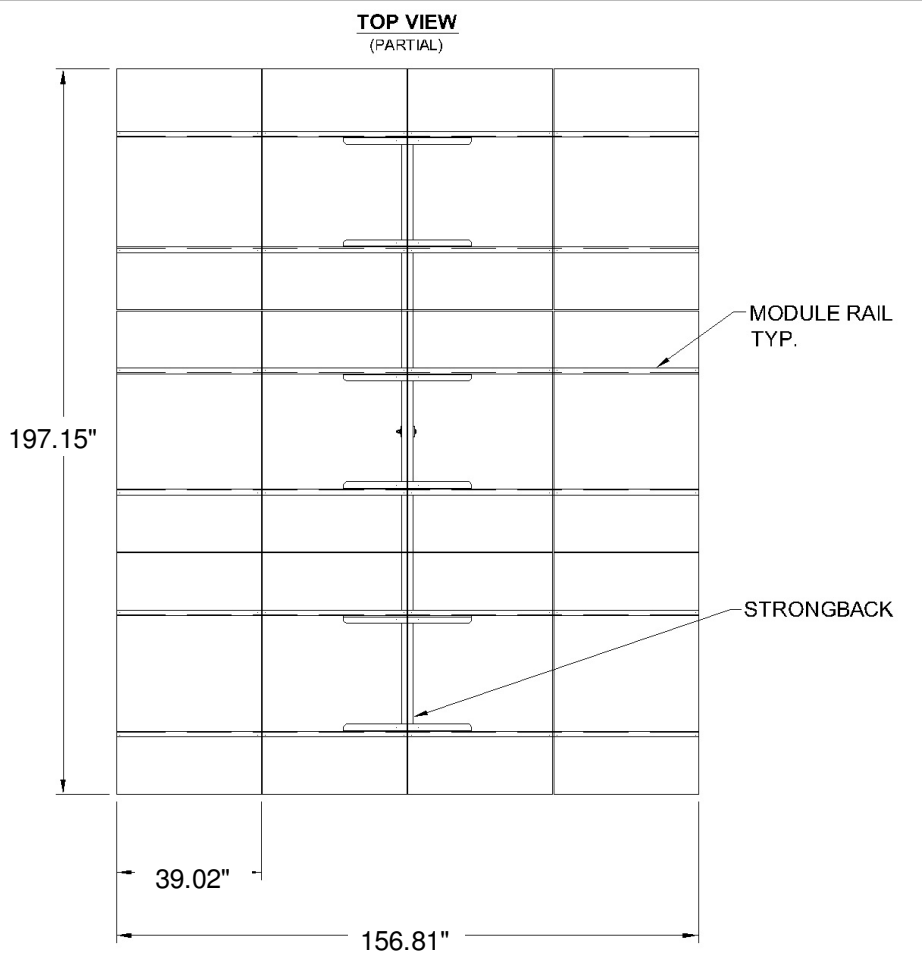

**TOP VIEW
(PARTIAL)**

- MANUFACTURER'S RECOMMENDATIONS
FOUNDATION RECOMMENDATIONS PER THE IBC2009,
ASCE 7-05, AND BASED ON THE FOLLOWING ASSUMPTIONS:**
- EXPOSURE C
 - 2,500 PSI CONCRETE
 - 8" SCH80 STEEL PIPE
 - 90 MPH MAXIMUM WIND SPEEDS
 - SOIL TYPE 3
 - SOIL IS UNDISTURBED AROUND FOOTINGS
 - 55 DEGREE MAXIMUM TILT
 - 30 PSF MAX. GROUND SNOW LOAD

	DIRECT POWER AND WATER 4000 VASSAR DRIVE NE ALBUQUERQUE, NEW MEXICO 87107		
	TITLE		TPM12-G-REC 280TP
CUSTOMER	SAMPLE DESIGN	DRAWN BY	WEB
		ENGINEER	J.R.
PROJECT	?	DATE	2016-12-22
<small>THIS DRAWING IS THE PROPERTY OF DPW SOLAR AND CANNOT BE USED, COPIED OR DISCLOSED WITHOUT PERMISSION. DO NOT SCALE DRAWING.</small>			