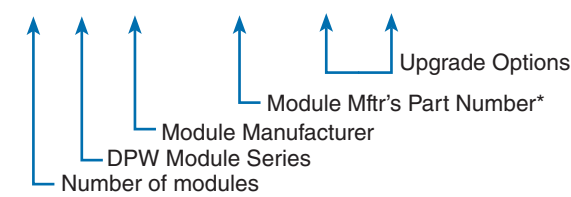


# Top-of-Pole Mount Selection and Pricing Guide

<p><b>Selection Guide Instructions:</b></p> <ol style="list-style-type: none"> <li>Determine Module Series by matching dimensions to size range (left column, below).</li> <li>Select number of modules to mount (move across chart) Note - <b>TPM Configuration block</b>, which includes the standard pipe size, layout and price.</li> <li>Determine Top of Pole Mount part number to order using <b>Ordering Guidelines Block</b> (to the right) or visit <a href="http://www.dpwsolar.com">www.dpwsolar.com</a> for TPM online configuration tool. Refer to <b>Options</b> page on back for more details.</li> </ol> <p><b>Prices subject to change without notice.</b></p>	<p><b>Ordering Guideline</b>  <b>TPM8-D-SHARP-NE170UC1-HWV-AA</b></p>  <p>*Important: Include complete module part # as listed on module manufacturer's specification sheet</p>	<p><b>TPM Configuration Key</b></p> <p>6" Pipe ← Standard Pipe Size</p> <p>4h x 2w-L ← Array Layout and Module Orientation (P=Portrait, L=Landscape)</p> <p>\$1,611 ← TPM Mounting Hardware List Price</p> <p><b>Based on standard design – 90 mph, 30 psf ground snow load.</b></p>
--	---	--

		Number of Modules													
MODULE SIZE RANGE (W x L)	DPW MODULE Series	1	2	3	4	6	8	9	10	12	14	15	16	18	
19-23" x 35-44"	A	2" Pipe 1hx1w-P \$188	2" Pipe 1hx2w-P \$200	2.5" Pipe 1hx3w-P \$399	3" Pipe 1hx4w-P \$421	4" Pipe 2hx3w-P \$649	4" Pipe 2hx4w-P \$774	N/A	6" Pipe 5hx2w-L \$1,197	6" Pipe 6hx2w-L \$1,407	6" Pipe 7hx2w-L \$1,555	N/A	6" Pipe 8hx2w-L \$1,811	N/A	
20-26" x 39-53"	B	2" Pipe 1hx1w-P \$193	2" Pipe 1hx2w-P \$233	2.5" Pipe 1hx3w-P \$410	3" Pipe 1hx4w-P \$444	4" Pipe 2hx3w-P \$718	4" Pipe 2hx4w-P \$814	N/A	6" Pipe 5hx2w-L \$1,264	6" Pipe 6hx2w-L \$1,481	6" Pipe 7hx2w-L \$1,634	N/A	6" Pipe 8hx2w-L \$1,897	N/A	
22-27" x 56-63"	C	2" Pipe 1hx1w-P \$200	2.5" Pipe 1hx2w-P \$365	3" Pipe 1hx3w-P \$421	4" Pipe 1hx4w-P \$637	4" Pipe 2hx3w-P \$832	6" Pipe 4hx2w-L \$1,156	6" Pipe 3hx3w-P \$1,423	6" Pipe 5hx2w-L \$1,481	6" Pipe 6hx2w-L \$1,629	8" Pipe 7hx2w-L \$2,153	N/A	8" Pipe 8hx2w-L \$2,608	8" Pipe 3hx6w-P \$2,842	
31-33" x 60-67"	D	2" Pipe 1hx1w-P \$205	3" Pipe 1hx2w-P \$421	4" Pipe 1hx3w-P \$616	4" Pipe 2hx2w-P \$746	6" Pipe * \$1,202	6" Pipe 4hx2w-L \$1,611	6" Pipe 3hx3w-P \$1,913	8" Pipe 5hx2w-L \$2,204	8" Pipe * \$2,660	8" Pipe 7hx2w-L \$2,927	8" Pipe * \$3,166	8" Pipe 4hx4w-P \$3,514	8" Pipe 6hx3w-L \$3,998	
38-40" x 51-56"	E	2" Pipe 1hx1w-P \$211	3" Pipe 1hx2w-P \$450	4" Pipe 1hx3w-P \$644	4" Pipe 2hx2w-P \$786	6" Pipe 3hx2w-L \$1,264	6" Pipe 4hx2w-L \$1,692	6" Pipe 3hx3w-P \$2,004	8" Pipe 5hx2w-L \$2,318	8" Pipe * \$2,802	8" Pipe 7hx2w-L \$3,075	8" Pipe 5hx3w-L \$3,303	8" Pipe 4hx4w-P \$3,685	8" Pipe 6hx3w-L \$4,198	
38-40" x 58-61"	F	2" Pipe 1hx1w-P \$216	3" Pipe 1hx2w-P \$467	4" Pipe 1hx3w-P \$678	4" Pipe 2hx2w-P \$832	6" Pipe 3hx2w-L \$1,321	6" Pipe 4hx2w-L \$1,777	6" Pipe 3hx3w-P \$2,096	8" Pipe 5hx2w-L \$2,426	8" Pipe * \$2,922	8" Pipe 7hx2w-L \$3,075	8" Pipe 5hx3w-L \$3,475	8" Pipe 4hx4w-P \$4,026	8" Pipe 6hx3w-L \$4,442	
37-42" x 61-67"	G	2" Pipe 1hx1w-P \$223	3" Pipe 1hx2w-P \$484	4" Pipe 1hx3w-P \$718	4" Pipe 2hx2w-P \$865	6" Pipe 3hx2w-L \$1,486	6" Pipe 4hx2w-L \$1,948	8" Pipe 3hx3w-P \$2,164	8" Pipe 5hx2w-L \$2,773	8" Pipe * \$3,029	8" Pipe 7hx2w-L \$3,981	8" Pipe 5hx3w-L \$4,334	N/A	N/A	
38-42" x 77-82"	H	2.5" Pipe 1hx1w-P \$245	3" Pipe 1hx2w-P \$541	4" Pipe 1hx3w-P \$809	6" Pipe 2hx2w-P \$974	6" Pipe 3hx2w-L \$1,669	8" Pipe 4hx2w-L \$2,187	8" Pipe 3hx3w-P \$2,426	8" Pipe 5hx2w-L \$3,110	8" Pipe * \$3,394	N/A	N/A	N/A	N/A	
50-52" x 65-79"	I	3" Pipe 1hx1w-P \$296	4" Pipe 2hx1w-L \$649	6" Pipe 3hx1w-L \$969	6" Pipe 2hx2w-P \$1,167	8" Pipe 3hx2w-L \$2,004	8" Pipe 4hx2w-L \$2,620	8" Pipe 3hx3w-P \$4,049	8" Pipe 5hx2w-L \$4,300	N/A	N/A	N/A	N/A	N/A	

ALL PIPE RECOMMENDATIONS CONFORM TO ASCE 7-05, Pipe size may vary per your site specific conditions. Verify by using the online TPM design tool at [www.dpwsolar.com](http://www.dpwsolar.com).

**\*MODULE ORIENTATION CHANGES WITH HIGH WIND VERSION (HWV) UPGRADE – SEE PAGE 2 FOR DETAILS.**


# Top-of-Pole Mounting Options Selection and Pricing Guide

**Instructions:** Add Options to the end of TPM part number in the order listed below  
 Add Option pricing to base TPM list price

Part Suffix	Description	Part Suffix	Description
HWV	High Wind Version	8IN	Mounting sleeve upgrade to 8" steel pipe
SSH	Stainless Steel Hardware for Rack Assembly	6IN	Mounting sleeve upgrade to 6" steel pipe
TRH	Tamper Resistant Hardware for Module Mounting	4IN	Mounting sleeve upgrade to 4" steel pipe
HGS	Hot-dip Galvanized Steel Components	3IN	Mounting sleeve upgrade to 3" steel pipe
PCA	Powder Coated Aluminum Components	2.5IN	Mounting sleeve upgrade to 2.5" steel pipe
AA	Anodized Aluminum Components		

## Ordering Guideline

TPM8-D-SHARP-NE170UC1-HWV-AA

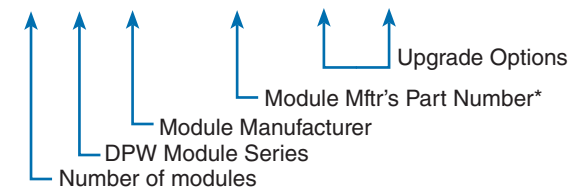

**\*Important:** Include complete module part # as listed on module manufacturer's specification sheet

**1. High Wind Version upgrade – up to 130 MPH or 60 psf Ground Snow Load - add 25% to price.**  
 Sites that exceed conditions for HWV will require a review by DPW Solar.

2. Finish Upgrade		Price Adder
HGS	Hot-dip Galvanized Steel Components	60%
PCA	Powder Coated Aluminum Components	20%
AA	Anodized Aluminum Components	20%

Powder Coated Steel Components Standard as of July 2016.

	90 mph Standard	130 mph HWV
TPM6-D	2hx3w-P	3hx2w-L
TPM12-D	3hx4w-P	6hx2w-L
TPM12-E	3hx4w-P	6hx2w-L
TPM12-F	3hx4w-P	6hx2w-L
TPM12-G	3hx4w-P	6hx2w-L
TPM12-H	3hx4w-P	6hx2w-L
TPM15-D	3hx5w-P	5hx3w-L

**3. Tamper Resistant Hardware for Module Mounting**

# of Mod	1	2	3	4	6	8	9	10	12	14	15	16	18
Add	\$21	\$26	\$32	\$36	\$47	\$58	\$63	\$68	\$79	\$89	\$94	\$100	\$110

TRH Package includes stainless steel pin-in-hex machine screws with nylon-insert lock nuts and matching hex-key

**4. Stainless Steel Hardware for Rack Assembly**

# of Mod	1	2	3	4	6	8	9	10	12	14	15	16	18
Add	\$11	\$26	\$37	\$42	\$63	\$84	\$94	\$99	\$136	\$146	\$157	\$172	\$193

SSH Package includes 100% stainless hardware for the structure

**5. Mounting Sleeve Upgrade**

Standard Mounting Pole	2.5"	3"	4"	6"	8"
2"	\$26	\$32	\$42	\$110	\$293
2.5"	–	\$26	\$37	\$105	\$272
3"	–	–	\$32	\$99	\$261
4"	–	–	–	\$94	\$256
6"	–	–	–	–	\$230



Albuquerque Office  
 1700 Louisiana NE  
 Suite 130  
 Albuquerque, NM 87110 USA

Corporate Headquarters  
 660 Beta Drive  
 Cleveland, Ohio 44143 USA

Telephone: 800.260.3792  
 Fax: 505.889.3548  
 Web Site: www.DPWSolar.com  
 E-mail: info@DPWSolar.com

© 2016 Preformed Line Products  
 SL-PL-1000-6  
 12.16.00